


R/F TO CARRY HORIZONTAL SHEAR AND LOAD FROM ONE SLAB TO NEXT AND TO ACT TOGETHER WITH BEAM

R/F TO CARRY VERTICAL SHEAR

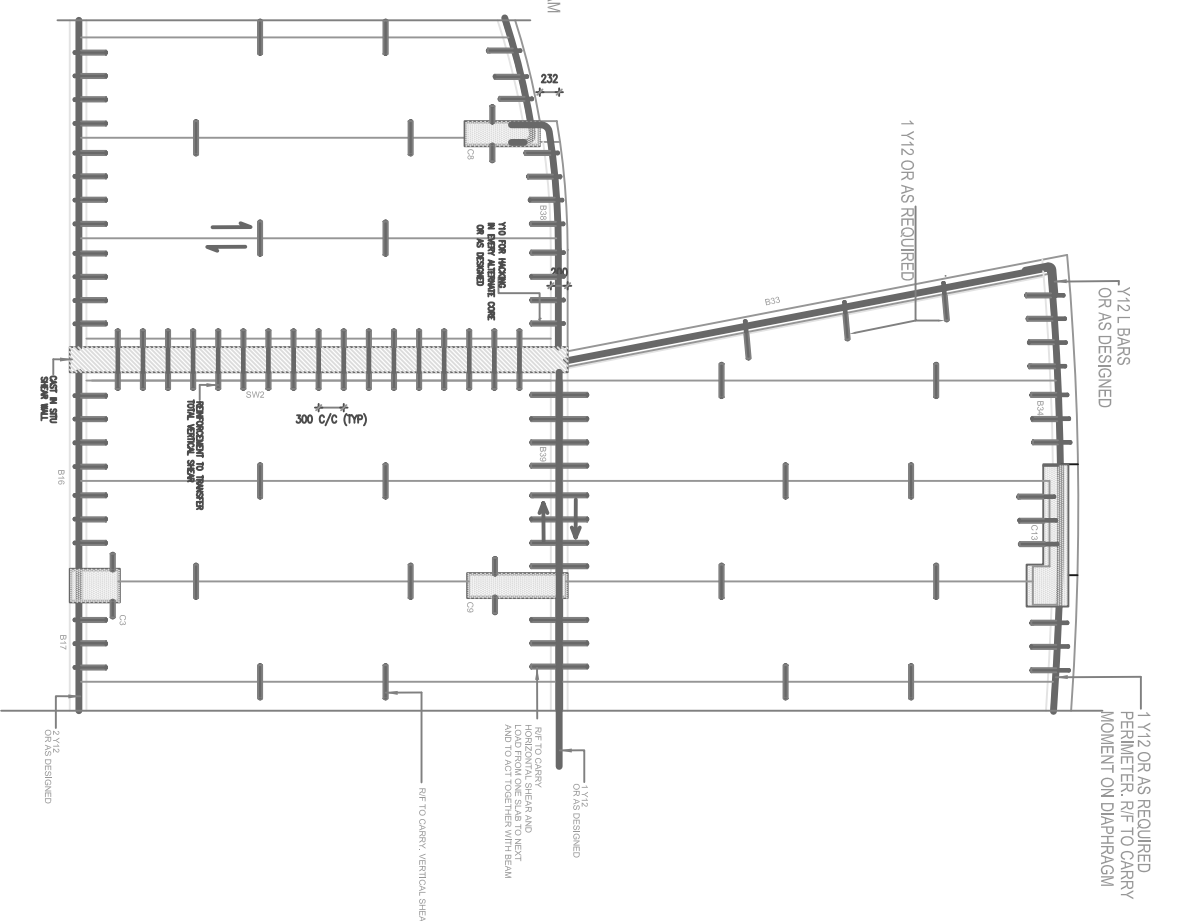

1Y12 OR AS REQUIRED PERIMETER, R/F TO CARRY MOMENT ON DIA-PHRAGM

R/F TO CARRY HORIZONTAL SHEAR AND VERTICAL SHEAR AND TO ACT TOGETHER WITH BEAM

R/F TO CARRY VERTICAL SHEAR

DEPENDENT TO TRANSFER TOTAL VERTICAL SHEAR